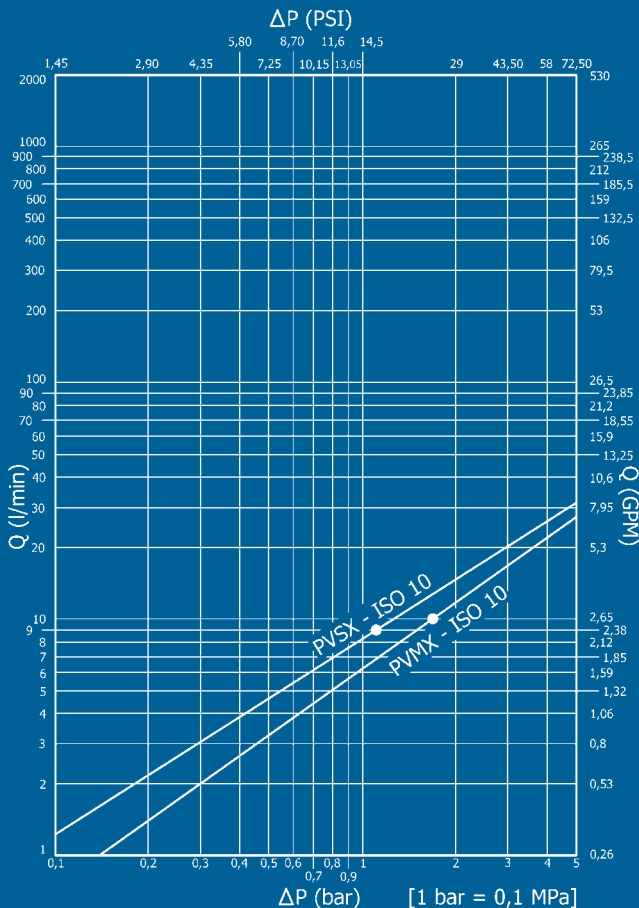


PVSX-PVMX



	Nominal size				Max working pressure	Rated flow	Max flow rate	Min burst pressure			Fluid spillage
	DNP	BG	ISO	mm				Male	Female	Coupled	
PVSX	10	2	10	4,8	70	9	20	140	190	190	0,6
PVMX	10	2	10	5	70	10	20	270	210	210	1,7



Caratteristiche tecniche

- Intercambiabilità: con i principali produttori
- Occlusione: valvola o sfera
- Aggancio: a vite
- Materiale: acciaio inox AISI 316
- Filettature: NPT
- Guarnizioni standard: FKM
- Temperatura d'esercizio: -25 °C +200 °C
- Guarnizioni opzionali: NBR, EPDM o altro
- Pressioni di esercizio: 700 bar
- Connessione in pressione: consentita (lato maschio o lato femmina)

Technical data

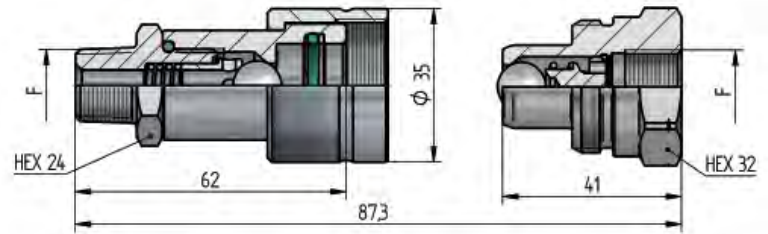
- Interchange: with the main producers
- Occlusion: poppet or ball
- Locking: screw
- Material: stainless steel AISI 316
- Threads: NPT
- Standard seals: FKM
- Working temperature: -25 °C +200 °C
- Optional seals: NBR, EPDM or more
- Working pressure: 700 bar
- Connection under pressure: allowed (both male or female side)

Technische Merkmale

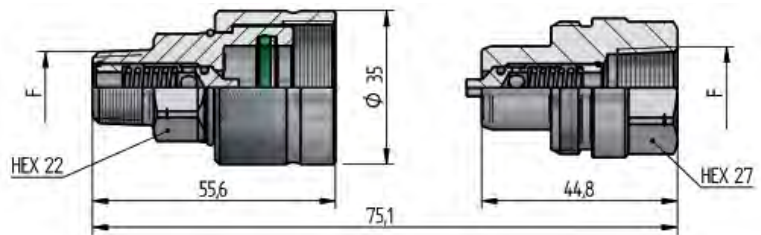
- Austauschbarkeit: mit den wichtigsten Lieferanten
- Verschluss: ventil oder kugel
- Kupplung: Schraubweise
- Werkstoff: rostfreiem Stahl AISI 316
- Gewinde: NPT
- Standard-Dichtungen: FKM
- Betriebstemperatur: -25 °C +200 °C
- Dichtungen nach Wahl: NBR, EPDM, usw.
- Betriebsdruck: 700 bar
- Kuppeln unter Druck: erlaubt (Steckerseite oder Muffenseite)

Caracteristiques techniques

- Intercambiabilité: avec les principaux producteurs
- Obturation: clapet ou bille
- Accrochage: a vissé
- Matériel: acier inoxydable AISI 316
- Taraudage: NPT
- Joints standard: FKM
- Température de service: -25 °C +200 °C
- Joints facultatifs: NBR, EPDM, ect.
- Pression de service: 700 bar
- Connexion sous pression: possible (côté male ou femelle)



PVSX DN10 - BG 2 - ISO 10


THREADS	L4	F	STANDARD	FEMMINA - FEMALE - MUFFE - FEMELLE			MASCHIO - MALE - STECKER - MALE		
				COD. F	Weight (g)	Packaging (pcs.)	COD. M	Weight (g)	Packaging (pcs.)
IG 1		NPT 3/8"	ANSI B1.20.3				PVSX.1010.013	172	100
AG 7	14	NPT 3/8"	ANSI B1.20.3	PVSX.1010.022	230	70			

PVMX DN10 - BG 2 - ISO 10


THREADS	L4	F	STANDARD	FEMMINA - FEMALE - MUFFE - FEMELLE			MASCHIO - MALE - STECKER - MALE		
				COD. F	Weight (g)	Packaging (pcs.)	COD. M	Weight (g)	Packaging (pcs.)
IG 1		NPT 3/8"	ANSI B1.20.3				PVMX.1010.013	154	100
AG 7	14	NPT 3/8"	ANSI B1.20.3	PVMX.1010.022	171	70			

THREADS


IG 1

AG 7

PLASTIC



NOMINAL SIZE			FEMALE DUST PLUG			MALE DUST CAP			COLOUR	MATERIAL
DNP	BG	ISO	COD. F	Weight (g)	Packaging (pcs.)	COD. M	Weight (g)	Packaging (pcs.)		
10	2	10	SPVS.10001	16	50	SPVS.10001	16	50	RED	Polyethylene
10	2	10	SPVS.10041	16	50	SPVS.10041	16	50	BLACK	Polyethylene

METAL



NOMINAL SIZE			FEMALE DUST PLUG			MALE DUST CAP			MATERIAL
DNP	BG	ISO	COD. F	Weight (g)	Packaging (pcs.)	COD. M	Weight (g)	Packaging (pcs.)	
10	2	10	SPVS.10100 C	119	100	SPVS.10103 C	109	50	Steel with chain
10	2	10	SPVS.10102 C	49	100				Aluminium with chain
10	2	10	SPVS.10100 L	114	50	SPVS.10103 L	104	50	Steel with plastic tongue
10	2	10	SPVS.10102 L	44	50				Aluminium with plastic tongue

GUARNIZIONI DI RICAMBIO / SPARE PARTS / ERSATZDICHTUNGEN / JOINTS

NOMINAL SIZE			FEMALE GASKET	
DNP	BG	ISO	VITON	PTFE
10	2	10	PDV.010.120 V	PVS.010.130